


Heavy duty chlorinated straight oil

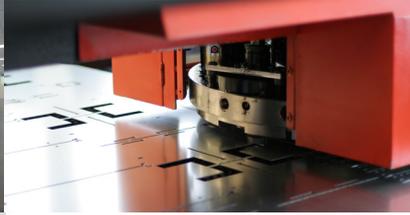

Description

Milform 70 is a heavy-duty chlorinated metal forming straight oil. Milform 70 offers both hydrodynamic and extreme pressure lubrication providing excellent anti-weld, anti-wear, and load carrying properties.

Application

Milform 70 performs well on a multitude of heavy duty metal forming processes. These processes include fine blanking and deep drawing.

Milform 70 can be applied by spray, drip, flood, or roll coat methods.

Features and benefits

- Superior tool and die life.
- Multi-metal safe.
- Excellent anti-weld properties.
- Medium viscosity insures easy handling.
- Outstanding heat and oxidation stability.
- Superior metal wetting and “cling” for total metal coverage.
- Good corrosion protection.

Methods of Application

Milform 70 is used as received.

Physical Data

Appearance	Clear, amber
Odour	Characteristic
Specific gravity	1.09 at 20°C
Viscosity	190 cSt at 40°C
Solubility	Insoluble in water, soluble in oils

Above figures are typical of those obtained with normal production tolerance and do not constitute a specification.

Handling and storage

Keep at temperatures between 5°C and 35°C in original container.

Packaging type

25, 200, 1.000 litre and bulk (on request).

Safety Data Sheet

The Safety Data Sheet should be consulted for specific information and information on Health, Safety and Environmental matters when handling this product.



Cimcool Industrial Products
Schiedamsedijk 20
3134 KK Vlaardingen
The Netherlands
Tel: +31 (0)10-4600660
cimcool.eu@duboischemicals.com
www.cimcool.com

