
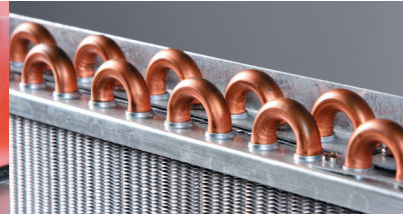


Evaporative lubricant

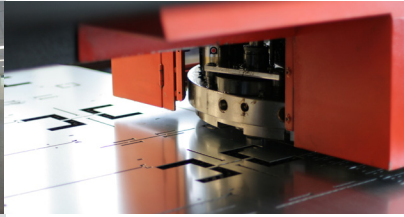

Description

Milform 2910 is an “Evaporative” lubricant developed for stamping, drawing and forming applications.

Application

Milform 2910 is primarily used to stamp sheet metal where post cleaning is prohibitive. The “Evaporative” nature of this unique lubricant provides high boundary lubrication, but without leaving unsightly residues that interfere with subsequent assembling and/or manufacturing processes.

Milform 2910 may be applied by spray, roller, drip or brush methods.

Features and benefits

- “Evaporates” at room temperature after use, requiring no subsequent cleaning.
- Uses ashless additives compatible with annealing processes.
- Good die and tool life.
- Non-staining to aluminium and aluminium alloys.
- Clean running product contains no oils.
- Economical - low total cost.
- Touch-dry on pre-coated surfaces

Methods of Application

Milform 2910 lubricant is used as received.

Physical Data

Appearance	Clear, colourless liquid
Odour	Characteristic
Density DIN51757/7 (1/1984)	770 kg/m ³ at 15°C
Viscosity	1.5 cSt at 40°C

Above figures are typical of those obtained with normal production tolerance and do not constitute a specification.

Handling and storage

Keep at temperatures between 5°C and 35°C in original container.

Packaging type

200, 1.000 litre and bulk (on request).

Safety Data Sheet

The Safety Data Sheet should be consulted for specific information and information on Health, Safety and Environmental matters when handling this product.



Cimcool Industrial Products
Schiedamsedijk 20
3134 KK Vlaardingen
The Netherlands
Tel: +31 (0)10-4600660
cimcool.eu@duboischemicals.com
www.cimcool.com

